

### KD Wall Shelf



**FEATURES:**

Furnished with a 1 1/2" sanitary rolled rim with a 1-1/4" turn-up edge on sides and rear.  
Unit is easily assembled employing the slip-fit TAB-LOK design.

**CONSTRUCTION:**

Shelf and brackets are die stamped and die formed.

**MATERIAL:**

**WS-KD Series** - 18 gauge stainless steel polished to a satin finish.

**AWS-KD Series** - Heavy gauge aluminum.


Item #: \_\_\_\_\_ Qty #: \_\_\_\_\_

Model #: \_\_\_\_\_

Project #: \_\_\_\_\_

**Requirements for NSF Installations**

1. Install at least 60" above floor.
2. Limit to dry storage.
3. Avoid contact with liquids.
4. For "Ganging-Up" installation, allow at least 2" between units or mount units side by side and seal joints with an approved sealant.

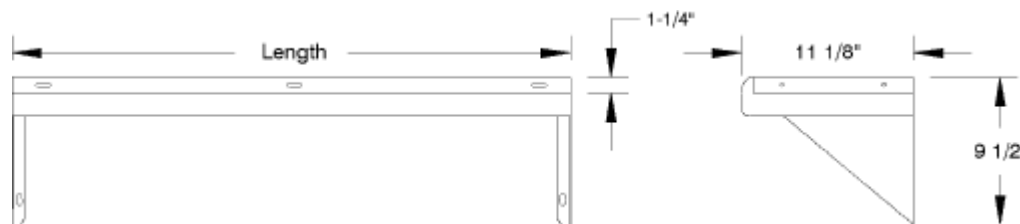

S/S	ALUMINUM	length
WS-KD-24	AWS-KD-24	24"
WS-KD-36	AWS-KD-36	36"
WS-KD-48	AWS-KD-48	48"
WS-KD-60	AWS-KD-60	60"

### Standard Wall Shelf



Furnished with a 1 1/2" sanitary rolled rim with a 1-1/2" turn-up edge at rear. Ends are turned down square.  
18 gauge type "430" stainless steel.

Secured to wall by means of bolts through support brackets.

Brackets can be positioned to accommodate wall studs.

Units 7 ft. and larger are furnished with 3 brackets.

10" Wide	Qty	12" Wide	Qty	15" Wide	Qty	18" Wide	Qty
WS-10-24		WS-12-24		WS-15-24		WS-18-24	
WS-10-36		WS-12-36		WS-15-36		WS-18-36	
WS-10-48		WS-12-48		WS-15-48		WS-18-48	
WS-10-60		WS-12-60		WS-15-60		WS-18-60	
WS-10-72		WS-12-72		WS-15-72		WS-18-72	
WS-10-84		WS-12-84		WS-15-84		WS-18-84	
WS-10-96		WS-12-96		WS-15-96		WS-18-96	
WS-10-108		WS-12-108		WS-15-108		WS-18-108	
WS-10-120		WS-12-120		WS-15-120		WS-18-120	
WS-10-132		WS-12-132		WS-15-132		WS-18-132	
WS-10-144		WS-12-144		WS-15-144		WS-18-144	



Length = 24" to 144" in 12" increments.

Width	A
10"	8"
12"	10"
15"	10"
18"	10"

