

TRUE FOOD SERVICE EQUIPMENT, INC.

2001 East Terra Lane • O'Fallon, Missouri 63366 (636)240-2400 • Fax (636)272-2408 • (800)325-6152 • Intl Fax# (001)636-272-7546 Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com

Project Name:		AIA#
Location:		
Item #:	Qty:	SIS #
Model #:		

Model: **GDM-7**

Glass Door Merchandiser: Swing Door Counter-Top Refrigerator





GDM-7

- The world's #1 manufacturer of glass door merchandisers.
- True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays packaged food and beverages.
- Designed for convenient access, fast service, and attractive display.
- Oversized, factory balanced, refrigeration system holds 33°F to 38°F (.5°C to 3.3°C).
- Exterior non-peel or chip white laminated vinyl; durable and permanent.
- Interior attractive, NSF approved, white aluminum interior liner with stainless steel floor.
- Self closing door. Positive seal, torsion type closure system.
- "Low-E", double pane thermal insulated glass door assembly with mitered plastic channel frame. The latest in energy efficient technology.
- Safety shielded fluorescent interior lighting for longer, brighter, shadowfree illumination.
- ▶ Entire cabinet structure is foamedin-place using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

ROUGH-IN DATA

Specifications subject to change without notice. Chart dimensions rounded up to the nearest %" (millimeters rounded up to next whole number).

			Cabinet Dimensions (inches) (mm)					NEMA	Cord Length (total ft.)	Crated Weight (lbs.)	
Model	Doors	Shelves	L	D†	Н	HP	Voltage	Amps		(total m)	(kg)
GDM-7	1	3	24	24¾	39¾	1/5	115/60/1	4.5	5-15P	9	200
			610	629	1010	1/5	230-240/50/1	2.4	A	2.74	91

† Depth does not include 1%" (35 mm) for door handle.

▲ Plug type varies by country.



GDM-7

Glass Door Merchandiser:

Swing Door Counter-Top Refrigerator



STANDARD FEATURES

DESIGN

 True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays packaged food and beverages.

REFRIGERATION SYSTEM

- Factory engineered self-contained, capillary tube system using environmentally friendly (CFC free) 134A refrigerant.
- Extra large evaporator coil balanced with higher horsepower compressor and large condenser; maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C).
- Sealed, cast iron, self-lubricating evaporator fan motor(s) and larger fan blade gives True merchandisers a more efficient low velocity, high volume airflow design. This unique design ensures faster temperature pull down of warm product, colder holding temperatures and faster recovery in high use situations.

CABINET CONSTRUCTION

- Exterior non-peel or chip white laminated vinyl; durable and permanent.
- Interior attractive, NSF approved, white aluminum liner with stainless steel floor.
- Insulation entire cabinet structure is foamed-in-place using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

- Cabinet fitted with 2½" (64 mm) legs.
- Door sign decal. Variety of decal options available.

DOOR

- "Low-E", double pane thermal insulated glass door assembly with mitered plastic channel frame. The latest in energy efficient technology.
- Door fitted with 12" (305 mm) long extruded handle.
- Self closing door. Positive seal, torsion type closure system.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.

SHELVING

- Three (3) adjustable, heavy duty PVC coated wire shelves; two 19 11/16 "L x 18"D (501 mm x 458 mm) and one (1) 19 11/16 "L x 16 ½" "D (501 mm x 420 mm). Four (4) chrome plated shelf clips included per shelf.
- Shelf support pilasters made of same material as cabinet interior; shelves are adjustable on ½" (13 mm) increments.

LIGHTING

- Safety shielded fluorescent interior lighting.
- Cabinet lighting utilizes electronic ballast and T-8 bulbs for brighter illumination, longer bulb life and increased energy efficiency.

MODEL FEATURES

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- See our website www.truemfg.com for latest color and decal offerings.
- Listed under NSF-7 for the storage and/or display of packaged or bottled product.

ELECTRICAL

 Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.




OPTIONAL FEATURES/ACCESSORIES

Upcharge and lead times may apply.
☐ 230 - 240V / 50 Hz.

- ☐ 4" (102 mm) legs.
- ☐ Black exterior.
- ☐ Cherry exterior.
- ☐ Walnut exterior.
- ☐ Stainless steel exterior.
- \square Red wine thermostat.
- □ White wine thermostat.□ Chocolate thermostat.
- ☐ Barrel lock (factory installed).
- ☐ Additional shelving.
- \square 1 ¼" (32 mm) pricing strips.

2315/16

PLAN VIEW

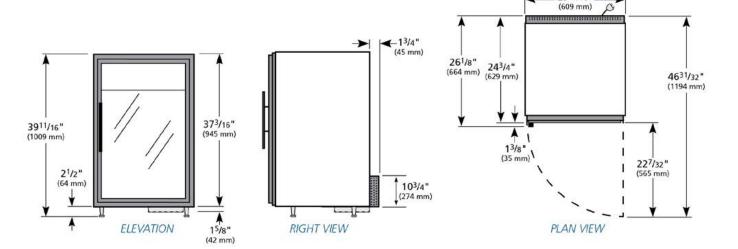

WARRANTY

Three year warranty on all parts and labor and an additional 2 year warranty on compressor.
(U.S.A. only)

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE

KCL	Model	Elevation	Right	Plan	3D	Back
	GDM-7	TFD033E	TFD033S	TFD033P	TFDY333	

TRUE FOOD SERVICE EQUIPMENT