

TRUE FOOD SERVICE EQUIPMENT, INC.

2001 East Terra Lane • O'Fallon, Missouri 63366 (636)240-2400 • Fax (636)272-2408 • (800)325-6152 • Intl Fax# (001)636-272-7546 Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com

Project Nar	. <i>AIA</i> #	
Location: _		
Item #:	Qty:	SIS #
Model #:		

Model:

TD-50-18

Underbar Refrigeration:
Solid Slide Lid Deep Well Horizontal Bottle Cooler



TD-50-18

- True's horizontal bottle coolers are designed with enduring quality and value. Our commitment to using the highest quality materials and oversized refrigeration assures colder product temperatures and years of trouble free service.
- Oversized, factory balanced, refrigeration system holds 33°F to 38°F (.5°C to 3.3°C).
- ▶ Forced-air cooling. Positively guided airflow cools bottles on top first. Evaporator coil virtually runs length of cooler for balanced temperatures throughout the cabinet.
- Exterior all stainless steel countertop and lid(s), heavy duty, wear resistant laminated black vinyl front and sides, matching black aluminum back.
- Interior long lasting, heavy duty galvanized steel. NSF-7 approved for packaged and bottled product.
- Evaporator is epoxy coated to eliminate the potential of corrosion.
- Entire cabinet structure is foamed-inplace using Ecomate. A new, innovative, high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Heavy duty, 10 mil thick pure grade PVC coated adjustable bin dividers.
- Removable, bottle cap opener(s) and cap catcher(s).

ROUGH-IN DATA

Specifications subject to change without notice. Chart dimensions rounded up to the nearest %" (millimeters rounded up to next whole number).

		Сара	acity		Cabinet Dimensions (inches) (mm)						Cord Length	Crated Weight	
Model	Lids	12 oz. Btls.	12 oz. Cans	Bin Dividers	L	D†	Н	HP	Voltage	Amps	NEMA Config.	(total ft.) (total m)	(lbs.) (kg)
TD-50-18	2	16.5	24	3	49%	26%	33%	1/3	115/60/1	8.1	5-15P	7	265
		Cases	Cases		1261	677	848	1/3	230-240/50/1	4.2		2.13	121

† Depth does not include $1\frac{1}{2}$ " (39 mm) for cap catcher and 1" (26 mm) for rear bumpers. note: 12 oz. bottles refers to 12 oz. longneck bottles.

▲ Plug type varies by country.



TD-50-18

Underbar Refrigeration:

Solid Slide Lid Deep Well Horizontal Bottle Cooler



STANDARD FEATURES

DESIGN

 True's refrigerated horizontal bottle coolers are designed with enduring quality and value. Our commitment to using the highest quality materials and oversized refrigeration assures colder product temperatures and years of trouble free service.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly (CFC free) 134A refrigerant.
- Extra large evaporator coil balanced with higher horsepower compressor and large condenser; maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C).
- Sealed, cast iron, self-lubricating evaporator fan motor(s) and larger fan blades give True bottle coolers a more efficient low velocity, high volume airflow design. This unique design ensures colder standard temperatures and faster recovery in high use situations.
- Condensing unit accessed from behind front grill, slides out for easy maintenance.

 Forced-air cooling. Positively guided air flow cools bottles on top first. Evaporator coil virtually runs length of cooler for balanced temperatures throughout the cabinet.

CABINET CONSTRUCTION

- Exterior all stainless steel countertop and lid(s), heavy duty, wear resistant laminated black vinyl front and sides, matching black aluminum back.
- Interior long lasting, heavy duty galvanized steel.
- Insulation entire cabinet structure is foamed-in-place using Ecomate. A new, innovative, high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Welded, heavy duty steel frame rail, black powder coated for corrosion protection.
- Removable, bottle cap opener(s) and cap catcher(s).

BIN DIVIDERS

 Three (3) heavy duty, 10 mil thick pure grade PVC coated adjustable bin dividers to maximize storage.

MODEL FEATURES

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- Listed under NSF-7 for the storage and/or display of packaged or bottled product.

ELECTRICAL

 Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.




OPTIONAL FEATURES/ACCESSORIES

Upcharge and lead times may apply.

- □ 230 240V / 50 Hz.
- □ 6" (153 mm) standard legs.
- \square 6" (153 mm) seismic/flanged legs.
- \square 2 ½" (64 mm) diameter rail castors.
- ☐ 3" (77 mm) diameter rail castors.
- ☐ Ratchet locks and handles. Requires one per lid.
- ☐ Low temperature models hold 20°F (-6.7°C) for applications with high ambient temperatures. Designed for full alcohol beverages only [some low alcohol products freeze below 32°F (0°C)].
- ☐ Remote cabinets (condensing unit supplied by others; system comes standard with 404A expansion valve and requires R404A refrigerant). Consult factory technical service department for BTU information. All remote units must be hard wired during installation.

PLAN VIEW

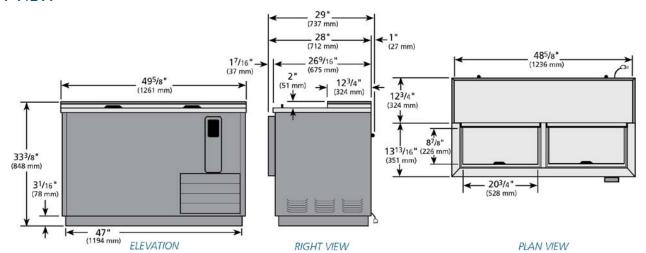

WARRANTY

One year warranty on all parts and labor and an additional 4 year warranty on compressor.

(U.S.A. only)

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Γ	KCL	Model	Elevation	Right	Plan	3D	Back
		TD-50-18	TFKY03E	TFKY01S	TFKY03P	TFKY033	